

1. Unique Identification of Product Type(s):

- **9.5mm SELFLOK WEATHERBOARDS: Wet Processed Fibreboard for Exterior Conditions (HB.E) as per EN13986**

2. Type, batch, serial number or any other element allowing identification of the construction product as required pursuant to Article 11(4):

WEATHERTEX 9.5mm WEATHERBOARDS located either on-product, on-package labeling or as part of invoicing documentation

3.3. Intended use(s) of the construction product, in accordance with the applicable harmonized technical specification, as foreseen by the manufacturer:

- External cladding – EN13896:2004 – 4.6: Hardboard for external use as non-structural components
- Non-structural internal lining - EN13896:2004 – 4.5: Hardboard for internal use as a non-structural components in humid conditions

4. Name, registered trade name or registered trade mark and contact address of the manufacturer as required pursuant to Article 12(2):

**WEATHERTEX PTY LTD
Masonite Road, Raymond Terrace, NSW 2324, Australia**

5. Where applicable, name and contact address of the authorized representative whose mandate covers the tasks specified in Article 12(2):

N/A

6. System(s) of assessment and verification of constancy of performance of the construction product as set out in Annex V:

AVCP System 4

7. In case of the declaration of performance concerning a construction product covered by a Harmonised Standard:

**EN 13986 : WOOD - BASED PANELS FOR USE IN CONSTRUCTION - CHARACTERISTICS, EVALUATION OF CONFORMITY AND MARKING
Classification - Fibreboard (Hardboard)**

Referring to pg. 10, 3.7.1 - Hardboard definition: fibreboard as defined in EN 316 having a density of > 900kg/m³, manufactured from lignocellulosic fibre by the "wet process", i.e. having a fibre content of more than 20% at the forming stage and being produced under heat and pressure.


Referring to pg. 11, 3.7.1.5 - Hardboard for external use as a non-structural component: hardboard incorporating the performance characteristics from 4.6 that are relevant to board type HB.E in EN 622.2.

| | ESSENTIAL CHARACTERISTICS | PERFORMANCE | HARMONISED TECHNICAL SPECIFICATION |
|---|--|------------------|------------------------------------|
| 1 | Durability against ageing (Bending Strength) | Pass | > 32 N/mm ² |
| 2 | Bending Stiffness (Modulus of Elasticity) | Pass | > 2900 N/mm ² |
| 3 | Durability (Swelling in Thickness 24h) | Pass | < 8% |
| 4 | Reaction to Fire | E | EN 13986 |
| 5 | Water Vapour Permeability | Wet Cup = 26 | |
| | | Dry Cup = 39 | |
| 6 | Airborne Sound Insulation | See Manufacturer | |
| 7 | Thermal Conductivity | 0,18 W/mK | |
| 8 | Biological Durability | Hazard Class 3 | |
| 9 | Content of Pentachlorophenol | N/A | |

10. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point

This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer by:

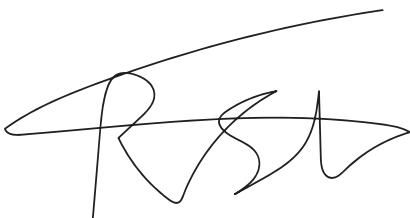

Mr. Russell J Stuart
Weathertex Product Support Engineer